


ACOUSTISHED® CV

Acoustished® CV A 40 and CV A 80 ceilings, specifically designed to be installed beneath a cold roof, offers superior sound absorption and ACERMI certification. Ideal for Industrial facilities.




Acoustished® CV

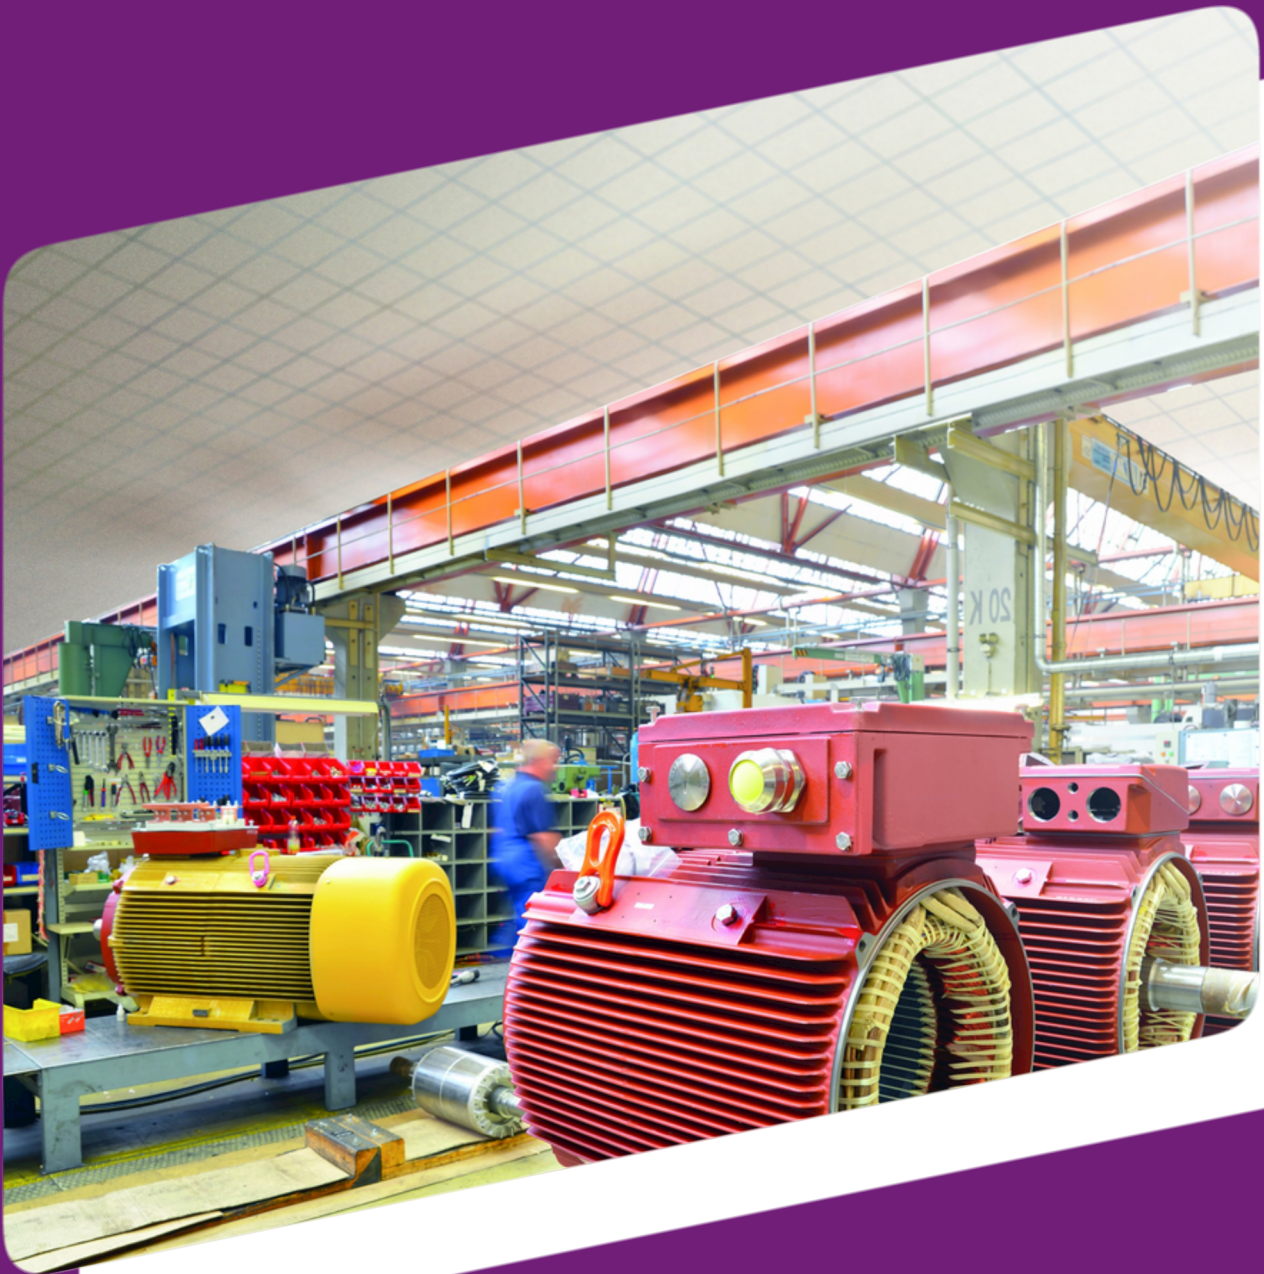

PANEL DESCRIPTION

1:	White decorative glass fiber veil
2:	High density stone wool panel, 38 or 77 mm thick
3:	Aluminum sheet
4:	A edges
5:	Natural glass veil on reverse side

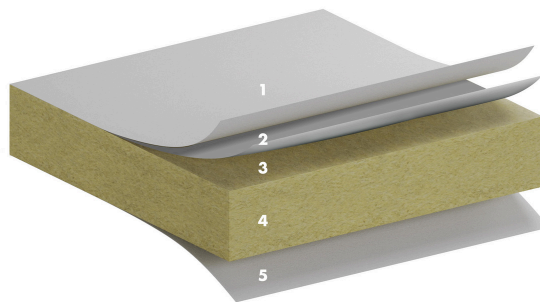

TYPE OF APPLICATION

- Additional areas




ACOUSTICS

Sound Absorption

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value rating for Noise Reduction Coefficient, NRC, according to ASTM C 423.

α_p , Practical sound absorption coefficient

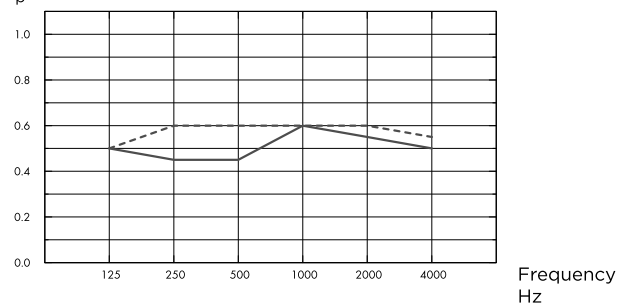

— Eurocoustic Acoustished® CV A 40, 240 mm o.d.s.40

--- Eurocoustic Acoustished® CV A 80, 280 mm o.d.s.
o.d.s = overall depth of system

THK mm	o.d.s. mm	α_p , Practical sound absorption coefficient						α_w	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
38	240	0.50	0.45	0.45	0.60	0.55	0.50	0.55	D
77	280	0.50	0.60	0.60	0.60	0.60	0.55	0.60	C



VISUAL APPEARANCE

Property	White O9
Light Reflectance (LRV%)	80%
Whiteness (L*)	92%
Gloss (85°)	< 1



FIRE REACTION

Standard	Classification
EN 13501-1	Euroclass A1



FIRE RESISTANCE

See respective classification reports for detailed information on installation and suspension system requirements.

Standard	Classification	Size	Load-bearing structures	Additional insulation
EN 13501-2	REI 30	600x600x40	Concrete, Steel	-
EN 13501-2	REI 30	600x600x40	Concrete, Steel, Timber	160 mm Eurolène® 603
NBN 713-020	SF 30	600 to 1200 x 600x40	Concrete, Steel	-
NBN 713-020	SF 30	600 to 1200 x 600x40	Concrete, Steel, Timber	160 mm Eurolène® 603



HUMIDITY RESISTANCE

100% flat irrespective of the Relative Humidity.



INDOOR AIR QUALITY

Certificate / Label	
French VOC	A+



MATERIAL HEALTH

EUCERB	Eurocoustic panels are manufactured using mineral wool certified by the European Certification Board for mineral wool products (EUCERB), which independently confirms that mineral wool is produced in conformity with the Note Q of European Regulation (EC) No 1272/2008 and therefore classification as a carcinogen does not apply.
REACH	Eurocoustic products comply with the REACH regulation of the European Chemicals Agency and therefore do not contain any Substances of Very High Concern (SVHC) with potential negative impacts on human health or the environment above 100ppm.



CARBON FOOTPRINT

Life cycle stages A1 to C4 of the EPD, in compliance with ISO 14025 / EN 15804.

	kg CO ₂ equiv/m ²
Acoustished CV 40	5.08
Acoustished CV 80	9.01



CIRCULARITY

Minimum recycled content Acoustished CV A 40	25%
Minimum recycled content Acoustished CV A 80	26%
Recyclability	Fully recyclable



CLEANABILITY

The ceiling surface does not retain dust, which makes the panels easier to clean. The ceiling can be cleaned using a light brush or a vacuum cleaner. This type of cleaning will help extend the service life of the ceilings.



INSTALLATION

- You are advised to ensure that air can circulate between the rooms and the plenum to balance the temperature and pressures on each side of the ceiling.
- Tiles can be cut with a craft knife without generating any noise or dust.
- The direction in which the panels should be installed is indicated on the back of the panels.
- Contact us if any mineral wool is to be laid in the plenum.



THERMAL PROPERTIES

Acoustished® CV panels are tested for thermal resistance according to EN 12667 and ACERMI-certified according to EN 13162.

	R (m ² K/W)
Acoustished CV A 40	1.10
Acoustished CV A 80	2.20



MECHANICAL PROPERTIES

Acoustished® CV panels are resistant to air and water vapour flows. According to EN 13964 - Annex F, Acoustished® CV ceilings are classified as C/90N/m² (40mm) and C/130N/m² (80mm). This value should be kept in mind if any mineral wool is to be laid in the plenum.



CE

Eurocoustic ceilings are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.



PRODUCT RANGE

Acoustished® CV packs are shrink-wrapped for protection. Pallets are wrapped in plastic film and must be stored under cover.

Format	1310x990x38	1370x990x38	1985x990x38	1500x1000x38	1310x990x77	1370x990x77	1985x990x77	1500x1000x77
Edge	A	A	A	A	A	A	A	A
White	•	•	•	•	•	•	•	•
Panels/pack	8	8	8	8	4	4	4	4
Grids	T35	T35	T35	T35	T35	T35	T35	T35
m ² /pack	10.38	10.85	15.72	12.00	5.19	5.43	7.86	6.00
Packs/pallet	8	8	8	8	8	8	8	8
Service class	C	C	C	A	C	C	C	A

COLOURS AND DESIGN

Colours

