


QUICK-LOCK® CORRO-PLUS

Visible T-bar systems for lay-in panels are recognized for its superior stability and easy installation. The Quick-Lock Corro-Plus system offers all benefits of the Quick-Lock T24 system and allows installations in corrosive environments up to class C4



Quick-Lock® Corro-Plus

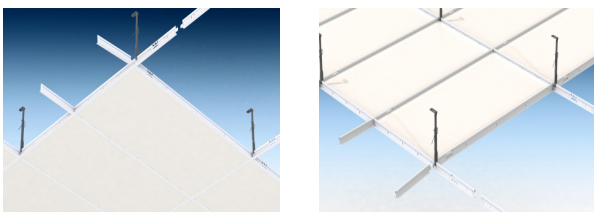

FIRE REACTION

	Fire standard	Class
Standard colors	EN 13501-1	A1
Special post-painted colors	EN 13501-1	A2



MECHANICAL PROPERTIES

Read more about mechanical properties in the data sheet and DoP, available under downloads



DURABILITY

Product	Classification	Standard
Corro-Plus EF T24 Hook-on	Class C - D*	EN 13964 * based on an expert opinion



CARBON FOOTPRINT

Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / ISO 21930 /EN 15804

Product	kg CO2equiv/m
Wall angle 19-24 Corrosion	0,52
Wall angle 22-22 Corrosion	0,54
T24/38 HE CT 600 Corrosion	1,19
T24/38 HE CT 1200 Corrosion	1,19
T24/38 HE MB 3600 Corrosion	1,18



CIRCULARITY

Fully recyclable

Recyclability
Fully recyclable



INDOOR AIR QUALITY

Quick-Lock systems are classified A+

Certificate / Label	
French VOC	A+



CE

Quick-Lock grid systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

COLOURS AND DESIGN

Colors



RAL9010