

ACOUSTISHED® MURAL



Acoustished® Mural offers superior acoustic absorption on walls, making it ideal for concert halls.




Acoustished® Mural



PANEL DESCRIPTION

1:	Decorative glass fiber veil in white or EuroColor
2:	A edges
3:	High density stone wool panel, 38 mm thick
4:	Natural glass veil on reverse side

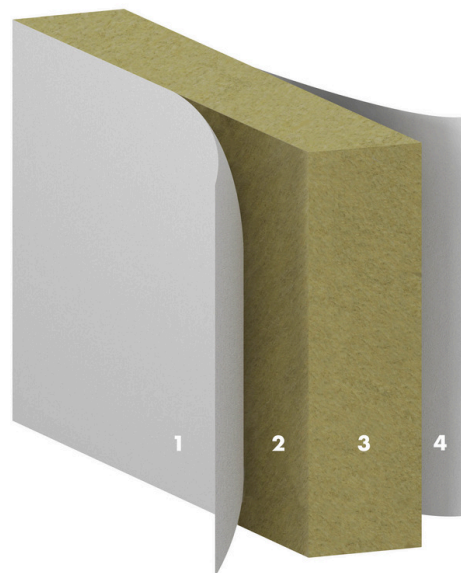

TYPE OF APPLICATION

- Additional areas




ACOUSTICS

Sound Absorption

Test results according to EN ISO 354. Classification according to EN ISO 11654.

α_p , Practical sound absorption coefficient

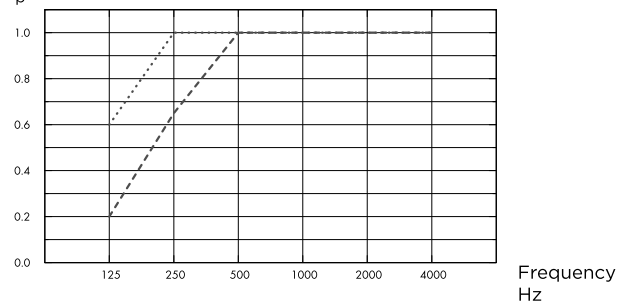

--- Eurocoustic Acoustished® A 40, 40 mm o.d.s.

···· Eurocoustic Acoustished® A 80, 80 mm o.d.s.

o.d.s = overall depth of system

THK mm	o.d.s. mm	α_p , Practical sound absorption coefficient						α_w	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
38	40	0.20	0.65	1.00	1.00	1.00	1.00	0.95	A
77	80	0.60	1.00	1.00	1.00	1.00	1.00	1.00	A



VISUAL APPEARANCE

Property	White O9
Light Reflectance (LRV%)	87%
Whiteness (L*)	94%
Gloss (85°)	1.2



FIRE REACTION

Standard	Classification
EN 13501-1	Euroclass A1



HUMIDITY RESISTANCE

100% flat irrespective of the Relative Humidity.



INDOOR AIR QUALITY

Certificate / Label	
French VOC	A+



MATERIAL HEALTH

EUCEB	Eurocoustic panels are manufactured using mineral wool certified by the European Certification Board for mineral wool products (EUCEB), which independently confirms that mineral wool is produced in conformity with the Note Q of European Regulation (EC) No 1272/2008 and therefore classification as a carcinogen does not apply.
REACH	Eurocoustic products comply with the REACH regulation of the European Chemicals Agency and therefore do not contain any Substances of Very High Concern (SVHC) with potential negative impacts on human health or the environment above 100ppm.



CARBON FOOTPRINT

Life cycle stages A1 to C4 of the EPD, in compliance with ISO 14025 / EN 15804.

	kg CO ₂ equiv/m ²
Acoustished 40	5.05
Acoustished 80	8.73



CIRCULARITY

Minimum recycled content Acoustished A 40	25%
Minimum recycled content Acoustished A 80	26%
Recyclability	Fully recyclable



CLEANABILITY

The ceiling surface does not retain dust, which makes the panels easier to clean. The ceiling can be cleaned using a light brush or a vacuum cleaner. This type of cleaning will help extend the service life of the ceilings.



INSTALLATION

- Acoustished® Mural panels can be installed in walls, with at a minimum height of 2,0 m, with Eurocoustic's specific accessories (fixing clips and finish profiles) and Quick-Lock® grids. See installation recommendations and our installation video on www.eurocoustic.com.
- Acoustished® Mural panels are rigid, easily handled and cut with a craft knife and are fitted on T35 grids.



THERMAL PROPERTIES

Acoustished® panels are tested for thermal resistance according to EN 12667 and ACERMI-certified according to EN 13162.

	R (m ² ·K/W)
Acoustished A 40	1,10
Acoustished A 80	2,20



MECHANICAL PROPERTIES

According to EN 13964 - Annex F, Acoustished® ceilings are classified as C/90N/m² (40mm) and C/130N/m² (80mm). This value should be kept in mind if any mineral wool is to be laid in the plenum.



CE

Eurocoustic ceilings are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.




PRODUCT RANGE

Acoustished® Mural packs are shrink-wrapped for protection. Pallets are wrapped in plastic film and must be stored under cover .

Format	1500x1000x38	1500x1000x77
Edge	A	A
White	•	•
EuroColors	•	•
Grids	T35	T35
Panels/pack	8	4
m ² /pack	12.00	6.00
Packs/pallet	8	8
Service class	A	A

COLOURS AND DESIGN

Colors



EuroColors

