

TONGA® DB 41 E

Tonga® dB 41 E ceilings offer a perfect balance between sound absorption and sound insulation. Ideal in places where acoustic is essential.




Tonga® dB 41 E



PANEL DESCRIPTION

1:	Decorative glass fiber veil in white
2:	High density mineral wool panel, 40 mm thick
3:	Painted E edges
4:	Acoustic membrane glass fiber veil on reverse side

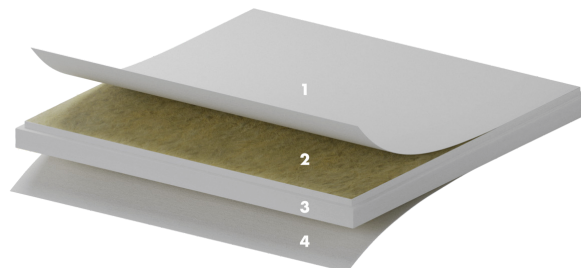

TYPE OF APPLICATION

- Office
- Education
- Healthcare




ACOUSTICS

Sound Absorption

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value rating for Noise Reduction Coefficient, NRC, according to ASTM C 423.

α_p , Practical sound absorption coefficient

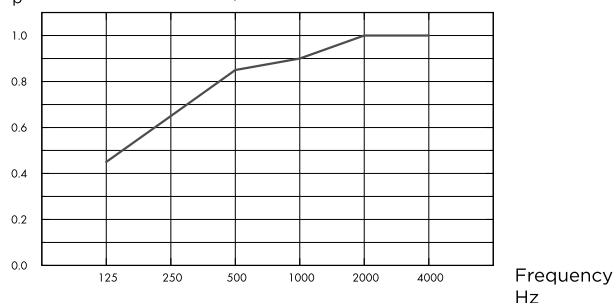

— Eurocoustic Tonga® dB 41 E, 200 mm o.d.s.
o.d.s = overall depth of system

THK mm	o.d.s. mm	α_p , Practical sound absorption coefficient						α_w	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
40	200	0.45	0.65	0.85	0.90	1.00	1.00	0.90	A

THK mm	o.d.s. mm	NRC
40	200	0.85

	D_{nfw} Weighted normalized flanking level difference, ISO 10848-2	CAC dB Ceiling Attenuation Class, ASTM 1414, ASTM E413	R_w Weighted sound reduction index, ISO 10140-2
	41 (-3; -8)	41	20 (-2; -2)
+ Acoustipan®	52 (-2; -9)	55	-



VISUAL APPEARANCE

Property	White 09
Light Reflectance (LRV%)	87%
Whiteness (L*)	94%
Gloss (85°)	1.2



FIRE REACTION

Standard	Class
EN 13501-1	A2-s1,d0



HUMIDITY RESISTANCE

Class C, relative humidity 95% and 30°C, according to EN 13964:2014.



INDOOR AIR QUALITY

Certificate / Label	
French VOC	A+
Eurofins	Indoor Air Comfort® Gold



MATERIAL HEALTH

EUCEB	Eurocoustic panels are manufactured using mineral wool certified by the European Certification Board for mineral wool products (EUCEB), which independently confirms that mineral wool is produced in conformity with the Note Q of European Regulation (EC) No 1272/2008 and therefore classification as a carcinogen does not apply.
REACH	Eurocoustic products comply with the REACH regulation of the European Chemicals Agency and therefore do not contain any Substances of Very High Concern (SVHC) with potential negative impacts on human health or the environment above 100ppm.



CIRCULARITY

Minimum recycled content	60%
Recyclability	Fully recyclable



CLEANABILITY

The ceiling surface does not retain dust, which makes the panels easier to clean. The ceiling can be cleaned using a light brush or a vacuum cleaner. This type of cleaning will help extend the service life of the ceilings.



INSTALLATION

- You are advised to ensure that air can circulate between the rooms and the plenum to balance the temperature and pressures on each side of the ceiling.
- Tiles can be cut with a craft knife without generating any noise or dust.
- The direction in which the panels should be installed is indicated on the back of the panels.
- Contact us if any mineral wool is to be laid in the plenum.



CE

Eurocoustic ceilings are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.




PRODUCT RANGE

The Tonga® dB 41 E ceilings are protected by a cardboard box. The pallets are banded and should be stored in a sheltered area

Format	600x600	1200x600
Edge	E	E
Grids	T24	T24
Panels/pack	10	6
m ² /pack	3,6	4,32
Packs/pallet	20	18
Service class	A (White 09)	A (White 09)

COLOURS AND DESIGN

Colors



Blanc 09