


Acoustichoc® Impact 30

Decorative glass fiber veil in white or colors, reinforced with a glass grid



High density stone wool panel, 40 mm thick

A Edges

Natural glass veil on reverse side



System composition



Acoustichoc® panels



QUICK-LOCK®
CLIP-ON T24 & T35



Euroclip

KEY FEATURES

- Impact-resistant to 30 km/h
- Acoustic absorption : $\alpha_w = 1.00$
- Reaction to fire : EuroClass A2-s1, d0
- 100% flat irrespective of the Relative Humidity
- IAQ: Class A+
- Fire resistance : REI 30




eurocoustic
SAINT-GOBAIN

Acoustichoc® Impact 30

- > System comprising Acoustichoc® 40 mm panels, T24 or T35 Quick-Lock® Clip-On grids and Euroclip anti-lift clips.



Acoustic absorption

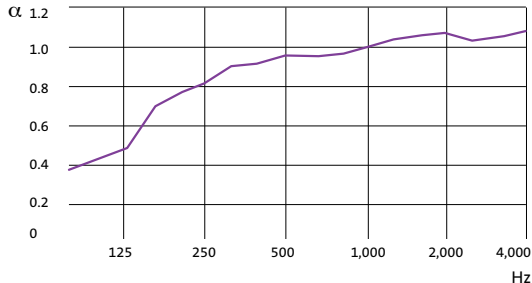

• $\alpha_w = 1.00$: class A / NRC = 1



Fire reaction

According to EN 13501-1: A2-s1, d0




Humidity performance

- 100% flat irrespective of the Relative Humidity.



Impact resistance

- For significant impacts: Class 2A - certified performance in accordance with the ball test methodology defined in EN 13964 – Annex D and conducted by the MFPA Leipzig GmbH laboratory.

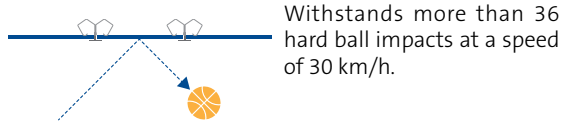

Environment and health

Environment

- Mineral wool is recyclable, and the vast majority of production waste is recycled. The recycled content of the mineral wool of our Acoustichoc® Impact 30 panels is 26%.
- For projects based on LEED®, BREEAM® and HQE™ Green Building certifications, EPD (Environmental Product Declarations) are available. Contact us.
- Eurocoustic is certified to ISO 14001:2015 «Environmental Management Systems».

Healthcare

- Eurocoustic stone wool is certified by EUCEB (European Certification Board for mineral wool product).
- Stone wool panels are manufactured with fibers exempt from the carcinogenic classification (European Regulation 1272/2008 as amended by European Regulation 790/2009). According to the International Agency for Research on Cancer, mineral wool is not classifiable as to its carcinogenicity to humans (Group 3).



CE marking

- DoP no.: G007.



Indoor Air Quality

- Acoustichoc® Impact 30 products are classed A+.



Installation

- Installation must conform to the requirements of the DTU 58.1 code of practice, the NF P 68203-1 and 2 standards and other applicable standards and codes of practice according to the type of room.

Acoustichoc® Impact 30 ceiling: 1,200 x 600 x 40 mm

- T24 or T35 runners should be arranged in parallel lines every 1,200 mm. Every 600 mm, a 1,200 mm cross tee is fitted at right angles.

Acoustichoc® Impact 30 ceiling: 1,500 x 1,000 x 40 mm

- T24 or T35 runners should be arranged in parallel lines every 1,500 mm. Every 1,000 mm, a 1,500 mm cross tee is fitted at right angles.
- You are advised to ensure that air can circulate between the rooms and the plenum to balance the temperature and pressures on each side of the ceiling.

To install an Impact 30 system, the following components are needed per m²:

Tiles	Euroclips
600 x 1,200 x 40 mm	4.2/m²*
1,000 x 1,500 x 40 mm	2/m²*

* Number of clips per m² provided for guidance only; the exact number should be calculated according to the building's configuration.



Cleaning

- The surface of Acoustichoc® Impact 30 ceilings does not retain dust, which makes them easier to clean.
- Acoustichoc® Impact 30 ceilings can be cleaned using light brush / vacuum cleaner.
- This type of cleaning will help extend the service life of Acoustichoc® Impact 30 ceilings.

AT A GLANCE

Euroclip anti-lift clips are available in 100 unit packs and A service class.

Acoustichoc® Impact 30 ceilings are shrink-wrapped for protection. Pallets are wrapped in plastic film and must be stored under cover.