


# MyConcept A 22

White decorative glass fiber veil,  
with customized printing

High density  
stone wool panel,  
22 mm thick

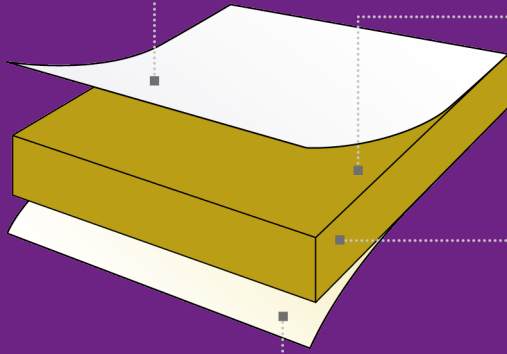

A Edges

Natural glass veil  
on reverse side

## KEY FEATURES

- Freedom of creation
- High Definition printing
- From one tile
- Validated performances



## MyConcept A 22

- > Rigid stone wool self-supporting panel.
- > Decorative veil with bespoke printing on the visible side.
- > Reinforced by a natural glass fiber veil on the reverse side.
- > Designed to be installed on T15 - T24 grids.



### Acoustic absorption

- $\alpha_w = 0.95$  : class A / NRC = 0.95



### Fire reaction

- According to the EN 13501-1 standard: the fire reaction of MyConcept varies with the coverage rate\* of the visual on the tile. Please contact us.

*Coverage rate of the visual on the tile: ratio between the printed surface and the whole surface of the tile.*



### Humidity performance

- 100% flat irrespective of the moisture content.



### Environment and health Environment

- Mineral wool is recyclable, and the vast majority of production waste is recycled. The recycled content of the mineral wool of our MyConcept A 22 panels is 45%.
- For projects based on LEED®, BREEAM® and HQE™ Green Building certifications, EPD (Environmental Product Declarations) are available. Contact us.
- Eurocoustic is certified to ISO 14001: 2015 «Environmental Management Systems».

### Healthcare

- Eurocoustic stone wool is certified by EUCEB (European CErtification Board for mineral wool product).
- Stone wool panels are manufactured with fibers exempt from the carcinogenic classification (European Regulation 1272/2008 as amended by European Regulation 790/2009). According to the International Agency for Research on Cancer, mineral wool is not classifiable as to its carcinogenicity to humans (Group 3).



### CE marking

N°DoP : 0007-02 and 0007-16.



### Indoor Air Quality

- MyConcept A 22 products are classed A+.



### Installation

- Installation must conform to the requirements of the DTU 58.1 code of practice, the NF P 68203-1 and 2 standards and other applicable standards and codes of practice according to the type of room.
- You are advised to ensure that air can circulate between the rooms and the plenum to balance the temperature and pressures on each side of the ceiling.
- MyConcept A 22 ceilings are fitted on T15 - T24 grids.
- Tiles can be cut with a craft knife without generating any noise or dust.
- Contact us if any stone wool is to be laid in the plenum.



### Cleaning

- The surface of MyConcept A 22 ceilings does not retain dust, which makes them easier to clean.
- MyConcept A 22 ceilings can be cleaned using light brush / vacuum cleaner.
- This type of cleaning will help extend the service life of MyConcept A 22 ceilings.

### AT A GLANCE

Edges	A
Grids	T15 - T24

### Module size (mm) and packaging

Width	600	600
Length	600	1200
Thickness	22	22
Service class	C	C

MyConcept panels are available from one tile